

Report No.: ATE20172031

Page 1 of 23

APPLICATION FOR VERIFICATION On Behalf of Hornady Manufacturing Company

HOM115 Hornady H Concept Safe Box

Model No.: 98141

FCC ID: 2AFJZ-98141

Prepared for : Hornady Manufacturing Company

Address : 3625 Old Potash Hwy Grand Island, United States, 68803

Prepared by : Shenzhen Accurate Technology Co., Ltd.

Address : 1/F., Building A, Changyuan New Material Port, Science &

Industry Park, Nanshan District, Shenzhen, Guangdong,

P.R. China

Tel: +86-755-26503290 Fax: +86-755-26503396

Report No. : ATE20172031

Date of Test : Oct. 09, 2017--Oct. 11, 2017

Date of Report : Oct. 12, 2017






TABLE OF CONTENTS

Descri	ption	Page
Test R	eport Declaration	
	•	_
1. TE	ST RESULTS SUMMARY	4
2. GE	ENERAL INFORMATION	5
2.1.	Description of Device (EUT)	5
2.2.	Special Accessory and Auxiliary Equipment	
2.3.	Description of Test Facility	
2.4.	Measurement Uncertainty	
3. MI	EASURING DEVICE AND TEST EQUIPMENT	7
3.1.	For Radiated Emission Measurement	7
3.2.	The Equipment Used to Measure Conducted Disturbance (L.I.S.N)	8
4. PC	OWER LINE CONDUCTED MEASUREMENT	9
4.1.	Block Diagram of Test Setup	9
4.2.	Power Line Conducted Emission Measurement Limits	
4.3.	Configuration of EUT on Measurement	9
4.4.	Operating Condition of EUT	
4.5.	Test Procedure	
4.6.	DATA SAMPLE	
4.7.	Measurement Uncertainty	
4.8.	Power Line Conducted Emission Measurement Results	
5. RA	ADIATED EMISSION MEASUREMENT	
5.1.	Block Diagram of Test	
5.2.	Radiated Emission Limit (Class B)	
5.3.	Manufacturer	
5.4.	Operating Condition of EUT	
5.5.	DATA SAMPLE	
5.1. 5.2.	Test ProcedureRadiated Emission Noise Measurement Result	
	NTENNA REQUIREMENT	
6.1.	The Requirement	23

Antenna Construction......23

6.2.



Report No.: ATE20172031

Page 3 of 23

Test Report Declaration

Applicant&: Hornady Manufacturing Company

address 3625 Old Potash Hwy Grand Island, United States, 68803

Manufacturer&: Zaifengda (Shenzhen) Industries Co., Ltd.

address BLDS 1-5, FUDIGANG 2nd Industrial Zone, Pingdi Longgang

Shenzhen, China

Product : HOM115 Hornady H Concept Safe Box

Model No. : 98141

Trade name : Hornady

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 15.207&15.209 ANSI C63.10: 2013

The device described above is tested by Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Accurate Technology Co., Ltd.

Date of Test:

Date of Report:

Oct. 09, 2017--Oct. 11, 2017

Oct. 12, 2017

Prepared by:

(Time Age Englisher)

Approved & Authorized Signer:

(Sean Liu, Manager)






Page 4 of 23

1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15.207	Pass
Radiated Emission	FCC Part 15.209	Pass





2. GENERAL INFORMATION

2.1.Description of Device (EUT)

The submitted sample is wireless transmitter which declared TX channel frequency is 125kHz.

		HOM115 Hornady H Concept Safe Box
Frequency	:	125kHz
Number of Channels	:	1
Modulation Type	:	ASK
Type of Antenna	:	Integral Antenna
Max antenna gain	:	5dBi
Power Supply	:	DC 12V(Powered by adapter)
Adapter information	:	Model: RK-1201000 Input: AC 100-240V 50/60Hz 0.6A Output: 12V,1.0A

2.2. Special Accessory and Auxiliary Equipment

N/A



Report No.: ATE20172031

Page 6 of 23

2.3. Description of Test Facility

EMC Lab : Recognition of accreditation by Federal Communications

Commission (FCC)

The Designation Number is CN1189 The Registration Number is 708358

Listed by Innovation, Science and Economic Development

Canada (ISEDC)

The Registration Number is 5077A-2

Accredited by China National Accreditation Service for

Conformity Assessment (CNAS)

The Registration Number is CNAS L3193

Accredited by American Association for Laboratory

Accreditation (A2LA)

The Certificate Number is 4297.01

Name of Firm : Shenzhen Accurate Technology Co., Ltd

Site Location : 1/F., Building A, Changyuan New Material Port, Science &

Industry Park, Nanshan District, Shenzhen, Guangdong,

P.R. China

2.4. Measurement Uncertainty

Conducted emission expanded uncertainty : U=2.23dB, k=2 Power disturbance expanded uncertainty : U=2.92dB, k=2

Radiated emission expanded uncertainty : U=3.08dB, k=2

(9kHz-30MHz)

Radiated emission expanded uncertainty : U=4.42dB, k=2

(30MHz-1000MHz)

Radiated emission expanded uncertainty : U=4.06dB, k=2

(Above 1GHz)






3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.
Item	Lquipinent	Mariuracturer	Model No.	Serial No.	Lasi Cai.	Interval
1.	Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan.07. 2017	1 Year
2.	Spectrum Analyzer	ŭ	FSV40	101495	Jan.07, 2017	1 Year
3.	Test Receiver		ESCS30	100307	Jan.07, 2017	1 Year
4.	Test Receiver	Rohde& Schwarz		100396/003	Jan.07, 2017	1 Year
5.	Test Receiver	Rohde& Schwarz		101526/003	Jan.07, 2017	1 Year
6.	Test Receiver	Rohde& Schwarz		101817	Jan.07, 2017	1 Year
7.	Bilog Antenna	Schwarzbeck	VULB9163	9163-194	Jan.13, 2017	1 Year
8.	Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan.13, 2017	1 Year
9.	LogPer.Antenna	Schwarzbeck	VUSLP	9111B-074	Jan.13, 2017	1 Year
			9111B	0.1.12 0.1.	Carrier, 2011	
10.	Biconical Broad	Schwarzbeck	VHBB	9124-617	Jan.13, 2017	1 Year
	Band Antenna		9124+BBA			
			9106	1-10101		4.5.4
11.	Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan.13, 2017	1 Year
12.	Horn Antenna	Schwarzbeck		9120D-655	Jan.13, 2017	1 Year
13.	Horn Antenna	Schwarzbeck	BBHA9120D		Jan.13, 2017	1 Year
14.	Vertical Active	Schwarzbeck	VAMP 9243	9243-370	Jan.13, 2017	1 Year
	Monopole Antenna					
15.	RF Switching	Compliance	RSU-M2	38322	Jan.07, 2017	1 Year
	Unit+PreAMP	Direction				
16.	Pre-Amplifier	<u> </u>	8447D	294A10619	Jan.07, 2017	1 Year
17.	Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	Jan.07, 2017	1 Year
18.	50 Coaxial Switch	Anritsu Corp	MP59B	6200237248	Jan.07, 2017	1 Year
19.	50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.07, 2017	1 Year
20.	RF Coaxial Cable	Schwarzbeck	N-5m	No.1	Jan.07, 2017	1 Year
21.	RF Coaxial Cable	Schwarzbeck	N-1m	No.6	Jan.07, 2017	1 Year
22.	RF Coaxial Cable	Schwarzbeck	N-1m	No.7	Jan.07, 2017	1 Year
23.	RF Coaxial Cable	SUHNER	N-3m	No.8	Jan.07, 2017	1 Year
24.	RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	Jan.07, 2017	1 Year
25.	RF Coaxial Cable	SUHNER	N-6m	No.10	Jan.07, 2017	1 Year
26.	RF Coaxial Cable	RESENBERGER	N-12m	No.11	Jan.07, 2017	1 Year
27.	RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	Jan.07, 2017	1 Year
28.	RF Coaxial Cable	SUHNER	N-2m	No.13	Jan.07, 2017	1 Year
29.	RF Coaxial Cable	SUHNER	N-0.5m	No.15	Jan.07, 2017	1 Year
30.	RF Coaxial Cable	SUHNER	N-2m	No.16	Jan.07, 2017	1 Year
31.	RF Coaxial Cable	RESENBERGER	N-6m	No.17	Jan.07, 2017	1 Year





3.2. The Equipment Used to Measure Conducted Disturbance (L.I.S.N)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan.07, 2017	1 Year
2.	Test Receiver	Rohde & Schwarz	ESPI3	100396/003	Jan.07, 2017	1 Year
3.	Test Receiver	Rohde & Schwarz	ESPI3	101526/003	Jan.07, 2017	1 Year
4.	L.I.S.N.	Schwarzbeck	NLSK8126	8126431	Jan.07, 2017	1 Year
5.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100305	Jan.07, 2017	1 Year
6.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100310	Jan.07, 2017	1 Year
7.	L.I.S.N.	Rohde & Schwarz	ESH3-Z6	100132	Jan.07, 2017	1 Year
8.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100305	Jan.07, 2017	1 Year
9.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100312	Jan.07, 2017	1 Year
10.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	Jan.07, 2017	1 Year
11.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283936	Jan.07, 2017	1 Year
12.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	Jan.07, 2017	1 Year
13.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.07, 2017	1 Year
14.	VOLTAGE PROBE	Schwarzbeck	TK9416	N/A	Jan.07, 2017	1 Year
15.	RF CURRENT PROBE	Rohde & Schwarz	EZ-17	100048	Jan.07, 2017	1 Year
16.	8-Wire Impedance Stabilisation Network	Schwarzbeck	CAT5 8158	8158-0035	Jan.07, 2017	1 Year
17.	RF Coaxial Cable	SUHNER	N-2m	No.2	Jan.07, 2017	1 Year
18.	RF Coaxial Cable	SUHNER	N-2m	No.3	Jan.07, 2017	1 Year
19.	RF Coaxial Cable	SUHNER	N-2m	No.14	Jan.07, 2017	1 Year

Report No.: ATE20172031 Page 9 of 23



4. POWER LINE CONDUCTED MEASUREMENT

4.1.Block Diagram of Test Setup

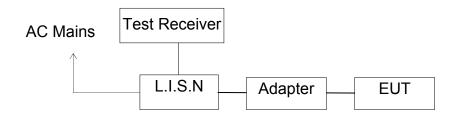

(EUT: HOM115 Hornady H Concept Safe Box)

4.2. Power Line Conducted Emission Measurement Limits

Frequency	Limit d	B(μV)
(MHz)	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.

NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3.Let the EUT work in test mode and measure it.



Report No.: ATE20172031

Page 10 of 23

4.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

4.6.DATA SAMPLE

Frequ	Quasi	Avera	Trans	QuasiP	Avera	Quasi	Avera	QuasiP	Averag	Remark
ency	Peak	ge	ducer	eak	ge	Peak	ge	eak	е	(Pass/Fail)
(MHz)	Level	Level	value	Result	Result	Limit	Limit	Margin	Margin	,
	(dBμv)	(dBμv)	(dB)	(dBμv)	(dBμv)	(dBμv)	(dBμv)	(dB)	(dB)	
X.XX	29.4	18.3	11.1	40.5	29.4	56.0	56.0	15.5	16.6	Pass

Transducer value = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Level/Average Level + Transducer value
Limit = Limit stated in standard

Calculation Formula:

Margin = Limit - Reading level value - Transducer value

4.7. Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at ATC is +2.23dB.



4.8. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : 125kHz TX Test Voltage: 120V/60Hz								
MEASUREMENT			1102_f	in"				
2017-10-11 9:								
Frequency MHz	Level dBµV		Limit dBµV		Detector	Line	PE	
0.244000 0.774000 1.508000 2.125000 11.500000 12.740000	31.30 34.30 33.70 29.70 44.40 30.80	11.1 11.2 11.3	56 56 56		QP QP QP	N N N N N	GND GND GND GND GND	
MEASUREMENT	RESULT	: "ZD10	1102_f	in2"				
2017-10-11 9: Frequency MHz			Limit dBµV	_	Detector	Line	PE	
0.358000 0.778000 1.800000 2.970000 11.500000 16.575000	30.80 30.00 19.40 21.80	11.1 11.2	46 46	23.9 15.2 16.0 26.6 28.2 33.0	AV AV AV	N N N N N	GND GND GND GND GND	
MEASUREMENT	RESULT	: "ZD10	1101_f	in"				
2017-10-11 9: Frequency MHz			Limit dBµV	_	Detector	Line	PE	
0.360000 0.414000 1.362000 4.950000 10.880000 15.585000	40.30 36.30	10.9 11.0 11.2 11.4 11.6 11.7	59 58 56 56 60	17.3 19.7 21.5	QP QP QP QP	L1 L1 L1 L1 L1	GND GND GND GND GND GND	
MEASUREMENT	RESULT	: "ZD10	1101_f	in2"				
2017-10-11 9: Frequency MHz	51 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.342000 0.416000 1.364000 4.950000 11.870000 13.730000	29.90 33.90 29.50 22.40 22.00 20.60	10.9 11.0 11.2 11.4 11.6	49 48 46 46 50	19.3 13.6 16.5 23.6 28.0 29.4	AV AV AV AV AV	L1 L1 L1 L1 L1	GND GND GND GND GND GND	



Test mode : 12	5kHz T	X					
Test Voltage: 2							
MEASUREMENT	RESULT	: "ZD10	1103_f	in"			
2017-10-11 10 Frequency		Transd	T.imit	Margin	Detector	Line	PE
MHz	dΒμV		dBµV	_	20000001	22110	
0.356000	31.00					N	GND
0.846000 1.800000	31.10 35.10	11.1 11.2				N N	GND GND
2.350000	29.90		56	26.1	~	N	GND
11.630000	39.70	11.6	60	20.3	~	N	GND
17.195000	27.50	11.7	60	32.5	QP	N	GND
MEA CUDEMENT	DECLIE	. "77710	1102 4	=== 0 !!			
MEASUREMENT		: "ZD10	1103_1	1n2"			
2017-10-11 10 Frequency		Trangd	T.imi+	Margir	Detector	Line	PE
MHz	dBµV				Decector	птие	1.13
0.360000	25.30			23.4	AV	N	GND
0.774000	30.20	11.1		15.8		N	GND
1.800000 2.350000	30.00		46	16.0 22.8		N N	GND GND
10.270000	19.10	11.3 11.6		30.9		N	GND
13.355000	16.50		-			N	GND
MEASUREMENT	RESULT	: "ZD10	1104 f	in"			
2017-10-11 10:	:16		_				
Frequency					Detector	Line	PE
MHz	dΒμV	dB	dΒμV	dB			
0.354000	39.20	10.9	59	19.7	QP	L1	GND
0.412000	41.10	11.0		16.5	~	L1	GND
1.790000	34.70	11.2				L1	GND
2.970000 11.255000	36.20	11.3	56	19.8	OP	$_{\rm L1}$	GND
	45 60	11 6	60			т 1	CMD
12.500000	45.60 36.00	11.6 11.6	60 60		QP	L1 L1	GND GND
12.500000		11.6 11.6	60 60	14.4	QP		
MEASUREMENT	36.00	11.6	60	14.4 24.0	QP		
MEASUREMENT 2017-10-11 10:	36.00 RESULT	11.6 : "ZD10	60 1104_ £	14.4 24.0	QP QP	L1	GND
MEASUREMENT	36.00	11.6	60	14.4 24.0	QP QP	L1	
MEASUREMENT 2017-10-11 10: Frequency	36.00 RESULT: :16 Level	11.6 : "ZD10 Transd	60 1104_f Limit	14.4 24.0	QP QP	L1	GND
MEASUREMENT 2017-10-11 10: Frequency MHz 0.352000 0.492000	36.00 RESULT: :16 Level dBµV 31.10 35.30	11.6 : "ZD10 Transd dB 10.9 11.0	60 1104_f Limit dBµV 49 46	14.4 24.0 Fin2" Margin dB 17.8 10.8	QP QP Detector AV AV	Line	GND PE GND GND
MEASUREMENT 2017-10-11 10: Frequency MHz 0.352000 0.492000 1.980000	36.00 RESULT :16 Level dBμV 31.10 35.30 28.20	11.6 : "ZD10 Transd dB 10.9 11.0 11.3	60 1104_f Limit dBµV 49 46 46 46	14.4 24.0 Fin2" Margin dB 17.8 10.8 17.8	QP QP Detector AV AV AV	Line L1 L1 L1 L1	GND PE GND GND GND
MEASUREMENT 2017-10-11 10: Frequency MHz 0.352000 0.492000	36.00 RESULT: :16 Level dBµV 31.10 35.30	11.6 : "ZD10 Transd dB 10.9 11.0	60 1104_f Limit dBµV 49 46	14.4 24.0 Fin2" Margin dB 17.8 10.8	QP QP Detector AV AV	Line	GND PE GND GND

Emissions attenuated more than 20 dB below the permissible value are not reported.

Report No.: ATE20172031 Page 13 of 23



ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

HOM115 Hornady H Concept £afe Box M/N:98141

Manufacturer: Zaifengda Operating Condition: 125kHz TX

1#Shielding Room Test Site:

Operator: DING Test Specification: L 120V/60Hz

Report NO.:ATE20172031 Comment: Start of Test: 2017-10-11 / 9:49:27

SCAN TABLE: "V 150K-30MHz fin"


Short Description: SUB STD VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer lr Bandw.

Frequency Frequency Width Time

150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

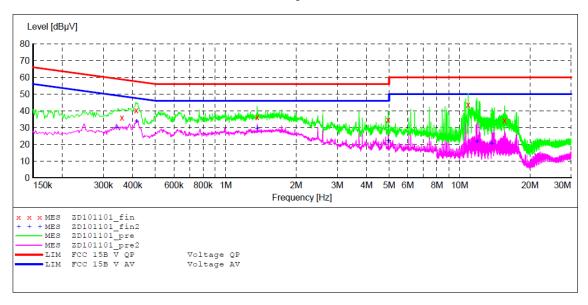

MEASUREMENT RESULT: "ZD101101 fin"

20	17-10-11 9:	51						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.360000	35.90	10.9	59	22.8	QP	L1	GND
	0.414000	40.30	11.0	58	17.3	OP	L1	GND
	1.362000	36.30	11.2	56	19.7	ÕΡ	L1	GND
	4.950000	34.50	11.4	56	21.5	OP	L1	GND
	10.880000	43.50	11.6	60	16.5	OP	L1	GND
	15.585000	34.20	11.7	60	25.8	QP	L1	GND

MEASUREMENT RESULT: "ZD101101 fin2"

2017-	10-11 9:5	51						
Fr	equency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dΒμV	dB	dBµV	dB			
	240000	00 00	10.0	4.0	10.0	7.77	T 1	CONTR
U	.342000	29.90	10.9	49	19.3	AV	L1	GND
C	.416000	33.90	11.0	48	13.6	AV	L1	GND
1	.364000	29.50	11.2	46	16.5	AV	L1	GND
4	.950000	22.40	11.4	46	23.6	AV	L1	GND
11	.870000	22.00	11.6	50	28.0	AV	L1	GND
13	.730000	20.60	11.6	50	29.4	AV	L1	GND

Report No.: ATE20172031 Page 14 of 23



ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

HOM115 Hornady H Concept Safe Box M/N:98141

Manufacturer: Zaifengda Operating Condition: 125kHz TX

Test Site: 1#Shielding Room

Operator: DING

Test Specification: N 120V/60Hz
Comment: Report NO.:ATE20172031 Comment: Report NO.:ATE201720: Start of Test: 2017-10-11 / 9:54:16


SCAN TABLE: "V 150K-30MHz fin"
Short Description: SUB STD VTERM2 1.70 Short Description:

Detector Meas. IF Time Bandw. Step Start Stop Transducer

Frequency Frequency Width

150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

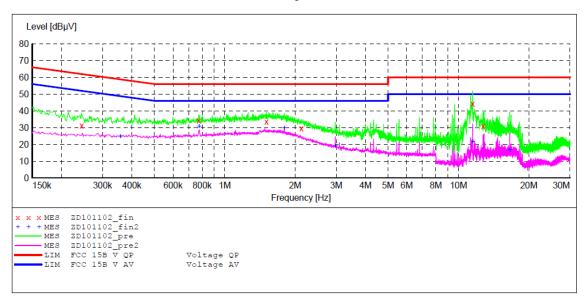

MEASUREMENT RESULT: "ZD101102 fin"

2017-10-11 9 Frequency MHz	:56 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.244000	31.30	10.9	62	30.7	QP	N	GND
0.774000	34.30	11.1	56	21.7	QP	N	GND
1.508000	33.70	11.2	56	22.3	QP	N	GND
2.125000	29.70	11.3	56	26.3	QP	N	GND
11.500000	44.40	11.6	60	15.6	QP	N	GND
12.740000	30.80	11.6	60	29.2	QP	N	GND

MEASUREMENT RESULT: "ZD101102 fin2"

2017-10-11 9:	56						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.358000	24.90	10.9	49	23.9	AV	N	GND
0.778000	30.80	11.1	46	15.2	AV	N	GND
1.800000	30.00	11.2	46	16.0	AV	N	GND
2.970000	19.40	11.3	46	26.6	AV	N	GND
11.500000	21.80	11.6	50	28.2	AV	N	GND
16.575000	17.00	11.7	50	33.0	AV	N	GND

Report No.: ATE20172031 Page 15 of 23



ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

HOM115 Hornady H Concept Safe Box M/N:98141

Manufacturer: Zaifengda Operating Condition: 125kHz TX

Test Site: 1#Shielding Room

Operator: DING

Test Specification: N 240V/60Hz

Comment: Report NO::ATE20172031 Start of Test: 2017-10-11 / 10:09:57

SCAN TABLE: "V 150K-30MHz fin"


SUB STD VTERM2 1.70 Short Description:

Detector Meas. IF Time Bandw. Start Stop Step Transducer

Frequency Frequency Width

150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

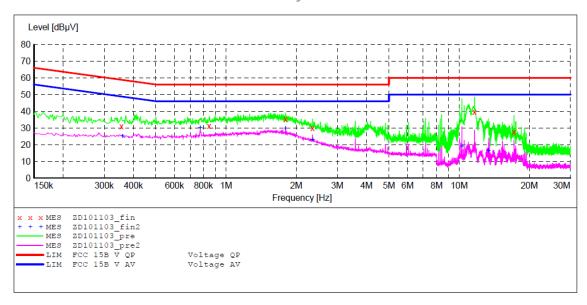

MEASUREMENT RESULT: "ZD101103 fin"

2017-10-1: Freque	ncy Lev	7el Transc ΒμV dE	l Limit 3 dBµV	Margin dB	Detector	Line	PE
0.3560	000 31.	.00 10.9	59	27.8	QP	N	GND
0.8460	000 31.	.10 11.1	. 56	24.9	QP	N	GND
1.8000	000 35.	.10 11.2	56	20.9	QP	N	GND
2.3500	000 29.	.90 11.3	56	26.1	QP	N	GND
11.6300	000 39.	.70 11.6	60	20.3	QP	N	GND
17.1950	000 27.	.50 11.7	60	32.5	Q.P	N	GND

MEASUREMENT RESULT: "ZD101103 fin2"

2017-10-11 10 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.360000	25.30	10.9	49	23.4	AV	N	GND
0.774000	30.20	11.1	46	15.8	AV	N	GND
1.800000	30.00	11.2	46	16.0	AV	N	GND
2.350000	23.20	11.3	46	22.8	AV	N	GND
10.270000	19.10	11.6	50	30.9	AV	N	GND
13.355000	16.50	11.6	50	33.5	AV	N	GND

Report No.: ATE20172031 Page 16 of 23



ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

HOM115 Hornady H Concept Safe Box M/N:98141

Manufacturer: Zaifengda Operating Condition: 125kHz TX

Test Site: 1#Shielding Room

Operator: DING

Test Specification: L 240V/60Hz

Report NO.:ATE20172031 Comment: Start of Test: 2017-10-11 / 10:14:47

SCAN TABLE: "V 150K-30MHz fin"


Short Description: SUB STD VTERM2 1.70

UB STD VIEWEL IF
Detector Meas. IF
Time Bandw. Start Stop Step Transducer

Frequency Frequency Width

150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

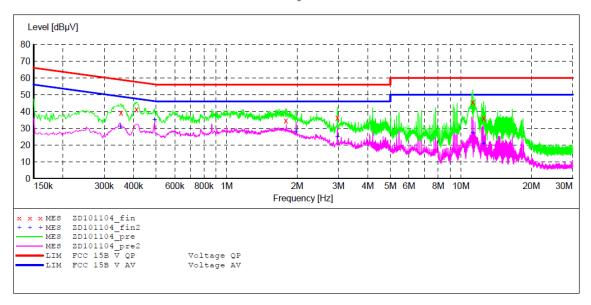


MEASUREMENT RESULT: "ZD101104 fin"

20	017-10-11 10 Frequency MHz	16 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.354000	39.20	10.9	59	19.7	QP	L1	GND
	0.412000	41.10	11.0	58	16.5	QP	L1	GND
	1.790000	34.70	11.2	56	21.3	QP	L1	GND
	2.970000	36.20	11.3	56	19.8	QP	L1	GND
	11.255000	45.60	11.6	60	14.4	QP	L1	GND
	12.500000	36.00	11.6	60	24.0	OP	L1	GND

MEASUREMENT RESULT: "ZD101104 fin2"

2017-10-11	10:16						
Frequency				Margin	Detector	Line	PE
MHz	: dBµV	dB	dBµV	dB			
0.352000	31.10	10.9	49	17.8	AV	L1	GND
0.492000	35.30	11.0	46	10.8	AV	L1	GND
1.980000	28.20	11.3	46	17.8	AV	L1	GND
2.970000	24.90	11.3	46	21.1	AV	L1	GND
11.255000	27.50	11.6	50	22.5	AV	L1	GND
12.500000	20.80	11.6	50	29.2	AV	L1	GND





5. RADIATED EMISSION MEASUREMENT

5.1.Block Diagram of Test


5.1.1.Block diagram of connection between the EUT and simulators




(EUT: HOM115 Hornady H Concept Safe Box)


5.1.2.Block diagram of test setup (In chamber)

(A)Radiated Emission Test Set-Up, Frequency below 30MHz

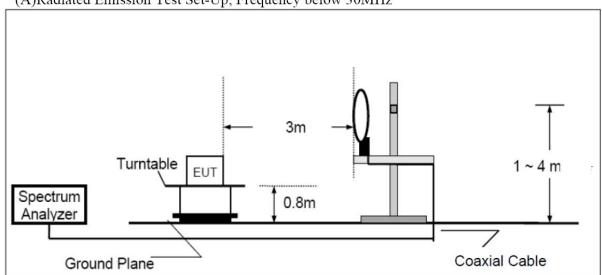

(B)Radiated Emission Test Set-Up, Frequency 30-1000MHz

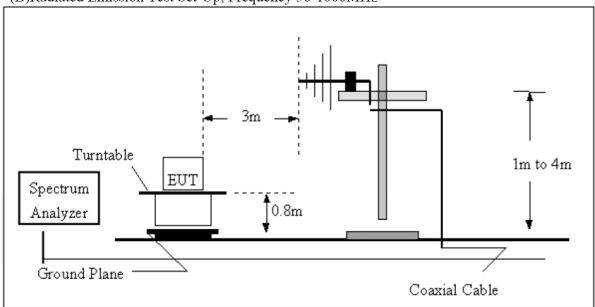





5.2.Radiated Emission Limit (Class B)

Frequency	Field Streng Limitation		Field Strength Limitation	n at 3m Measurement Dist
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	2400 / F(KHz) 300m		10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	.490 – 1.705 24000 / F(KHz)		100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 - 30.00	5 – 30.00 30 30		100* 30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

Limit: <u>2400/125=19.2uV/m@300m</u>

Distance Correction Factor=40log(test distance/specific distance)

5.3.Manufacturer

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.HOM115 Hornady H Concept Safe Box (EUT)

Model Number: 98141

Manufacturer: Zaifengda (Shenzhen) Industries Co., Ltd.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3.Let the EUT work in test mode and measure it.

5.5.DATA SAMPLE

Frequency	Reading	Factor	Result	Limit	Margin	Remark
(MHz)	(dBμv)	(dB/m)	(dBμv/m)	(dBμv/m)	(dB)	
X.XX	49.83	-22.03	27.80	43.50	-15.70	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dBµv) = Uncorrected Analyzer/Receiver reading

Factor (dB/m)= Antenna factor + Cable Loss – Amplifier gain

Result($dB\mu v/m$) = Reading + Factor

Limit (dBμv/m)= Limit stated in standard

Margin (dB) = Result(dB μ v/m) - Limit (dB μ v/m)



Report No.: ATE20172031 Page 19 of 23

Calculation Formula:

Margin(dB) = Result (dB μ v/m)–Limit(dB μ v/m) Result(dB μ v/m)= Reading(dB μ v)+ Factor(dB/m)

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

5.1.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement.

From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

From 30MHz to 1000MHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector for the frequency bands 9kHz to 90kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209(d)(2).


The final level, expressed in dBuV/m, is arrived at by taking the reading from the EMI receiver(Level dBuV) and adding the antenna correction factor and cable loss factor(Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9kHz – 150kHz: ResBW:200Hz 150kHz – 30MHz: ResBW:9kHz

The bandwidth of the EMI test receiver (R&S ESCS30) is set at 120kHz from 30MHz to 1000MHz.

5.2 Radiated Emission Noise Measurement Result

PASS.






From 9kHz to 30MHz

Frequency (MHz)	Quasi Peak (dBμV/m)	Detector	Azimuth	Height (cm)	Limit @3m (dB _µ V/m)	Margin (dB)
0.125	98.26	AV	153	136	105.7	-7.44
2.21	36.05	QP	352	169	69.5	-33.45
2.59	35.48	QP	205	225	69.5	-34.02
0.125	89.99	AV	185	158	105.7	-15.71
2.66	33.05	QP	352	169	69.5	-36.45
3.56	34.63	QP	15	151	69.5	-34.87

Part 15 Section 15.31(f)(2) (9kHz-30MHz) Limit at 3m=Limit at 300m-40*log(3(m)/300(m)) Limit at 3m=Limit at 30m-40*log(3(m)/30(m))



Site: 1# Chamber Tel:+86-0755-26503290



From 30MHz to 1000MHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China

,P.R.China Fax:+86-0755-26503396

Job No.: DING11 #1071 Polarization: Horizontal

Standard: FCC Class B 3M Radiated Power Source: AC 120V/60Hz


Test item: Radiation Test Date: 17/10/11/
Temp.(C)/Hum.(%) 25 C / 55 % Time: 15/51/41

EUT: HOM115 Hornady H Concept Safe Box Engineer Signature: DING

Mode: TX 125kHz Distance: 3m

Model: 98141 Manufacturer: Zaifengda

Note: Report NO.:ATE20172031

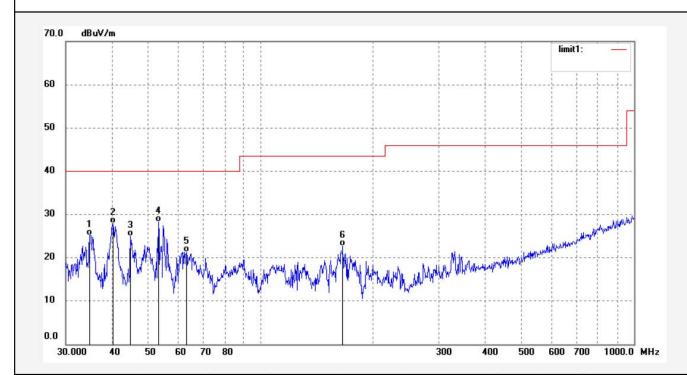

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.7705	41.05	-15.89	25.16	40.00	-14.84	QP	100	29	
2	40.1581	45.99	-18.13	27.86	40.00	-12.14	QP	100	203	
3	44.7793	43.90	-18.88	25.02	40.00	-14.98	QP	100	291	
4	53.1922	49.64	-21.32	28.32	40.00	-11.68	QP	100	304	
5	63.1857	43.09	-21.87	21.22	40.00	-18.78	QP	100	50	
6	166.0540	43.33	-20.72	22.61	43.50	-20.89	QP	100	129	



Job No.: DING11 #1072

Manufacturer: Zaifengda

ACCURATE TECHNOLOGY CO., LTD.

Site: 1# Chamber Tel:+86-0755-26503290 F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Fax:+86-0755-26503396 Science & Industry Park, Nanshan Shenzhen, P.R. China

Report No.: ATE20172031

Page 22 of 23

Polarization: Vertical


Standard: FCC Class B 3M Radiated Power Source: AC 120V/60Hz

Test item: Radiation Test Date: 17/10/11/ Temp.(C)/Hum.(%) 25 C / 55 % Time: 15/53/05

EUT: HOM115 Hornady H Concept Safe Box Engineer Signature: DING

Mode: TX 125kHz Distance: 3m Model: 98141

Note: Report NO.:ATE20172031

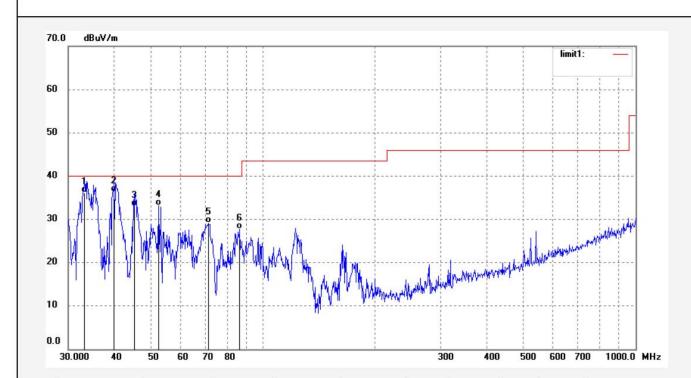

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2180	51.60	-15.50	36.10	40.00	-3.90	QP	100	109	
2	39.8769	54.32	-18.04	36.28	40.00	-3.72	QP	100	218	
3	45.2538	52.06	-19.01	33.05	40.00	-6.95	QP	100	178	
4	52.4498	54.40	-21.20	33.20	40.00	-6.80	QP	100	35	
5	71.4539	51.36	-22.14	29.22	40.00	-10.78	QP	100	90	
6	86.6867	49.61	-21.95	27.66	40.00	-12.34	QP	100	321	




6. ANTENNA REQUIREMENT

6.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The max Antenna gain of EUT is 5dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

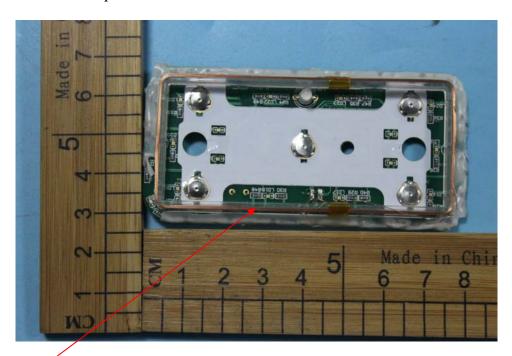

Antenna